

Efficient 300W Power Supply for Shuttle XPCs

The Shuttle XPC Accessory PC61J is a high-end power supply with a maximum output wattage of 300W suitable for certain Shuttle XPCs of the H, J and R series. With a low noise level, it is ideal for use in any noise-sensitive environments such as a library and offices. Thanks to its 80 PLUS Bronze certification for power-efficient devices, this power supply is also suitable for ENERGY STAR® compliant systems. Benefit from less power consumption and less energy costs using PC61J..




Feature Highlight

Input	<ul style="list-style-type: none"> Input Voltage: 100~240V AC Input Current: 6A / 3A (115/230V AC) Frequency: 60~50 Hz Active PFC (Power Factor Correction)
Output	<ul style="list-style-type: none"> Total combined output (3.3/5/12V): 300W Total combined output (3.3/5V): 80W Max. Current: +12V1: 16A / +12V2: 16A / +3.3V: 12A / +5V: 15A / +5VSB: 2A (Standby) / -12V: 0.3A Protection: OTP/OPP/UVP/OCP/SCP/OVP +5V Standby voltage: 2A
Energy efficiency	<ul style="list-style-type: none"> 80PLUS Bronze compliant: the PSU provides at least 82/85/82% efficiency at 20/50/100% load. aligns to the power supply requirements of Energy Star 4.0
Connectors	<ul style="list-style-type: none"> Mainboard ATX 4 pin (12V) + 20 pin 3x S-ATA, 2x Molex, 1x FDD, PCIe 6 pin Cable length designed for the XPC
Environmental	<ul style="list-style-type: none"> Operating Temperature: 10~50°C Storage Temperature: -40~70°C MTBF: >100.000 hours (75% load, 25°C)
Safety/EMI	<ul style="list-style-type: none"> EMI/RFI: FCC class B, CE, BSMI, CCC Safety: cUL, TÜV, CB, BSMI, CCC
Other	<ul style="list-style-type: none"> Dimension: 200 x 82 x 53 mm (l x w x h) Weight: 1.1kg net, 1.2kg gross
Compatibility	<ul style="list-style-type: none"> Supported Shuttle XPC models: H series: SH67H3, SH67H7, SN78SH7, SG45H7, SP45H7 J series: SG41J1/J4, SH55J2 R series: SH61R4, SH81R4, SH87R6, SH97R6, SH110R4, SH170R6 Cable lengths designed for the Shuttle XPC.



ATX 20 pin



ATX 12V 4 pin



6 pin PCIe X16



1x Floppy



2x Molex



3x S-ATA



Easy installation of PC61J




① Place the power supply in position. Secure from the back with three Phillips head screws.



② Feed the HDD cable through the reverse hole as shown and attach to storage devices.



③ Attach the 20-pin ATX and 2x2-pin (or 1x4-pin) power supply plugs to the mainboard.

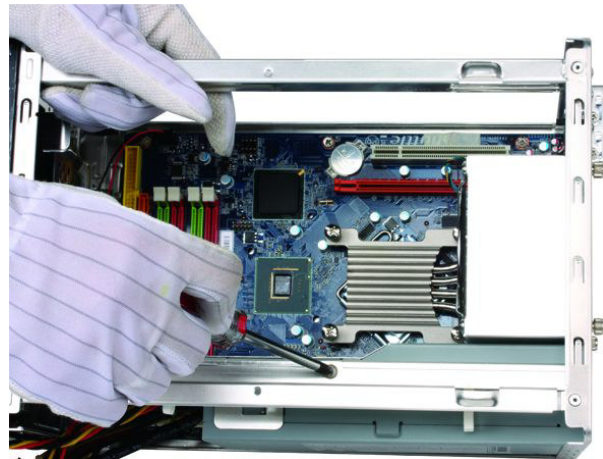

④ Finally, secure again from top with Phillips head screw.



Images are for illustration purpose only.

Power Supplies for XPCs with H, J and R chassis

Power Supply	PC61J	PC63J
Output wattage	300W	500W
Efficiency logo	80 PLUS Bronze	80 PLUS Bronze
Additional power connectors for graphics cards	6-pin (75W) 	6-pin (75W) and 6+2-pin (150W) 
Compatible Shuttle XPCs	<ul style="list-style-type: none"> • Upgrade kit for SG41J1, SG41J4, SH61R4 • Standard-power supply for SH67H3, SH67H7, SN78SH7, SG45H7, SP45H7, SH55J2 	<ul style="list-style-type: none"> • Upgrade kit for SG41J1, SG41J4, SH61R4, SH67H3, SH67H7, SN78SH7, SG45H7, SP45H7, SH55J2 • Standard-power supply for SX58H7 (Pro), SX58J3, SZ68R5, SZ77R5, SX79R5

Please refer to the support list for detailed graphics card support information.